

526,274

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 March 2004 (18.03.2004)

PCT

(10) International Publication Number
WO 2004/022436 A2

(51) International Patent Classification⁷:
47/42, 51/32, A46B 11/00, A45D 27/04

B65D 1/32,

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/GB2003/003717

(22) International Filing Date: 28 August 2003 (28.08.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0220448.5 4 September 2002 (04.09.2002) GB

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: EGGLEDEN, John, Alan [GB/GB]; Cottage Barn, Hurston Place Farm, Hurston Lane, Pulborough, West Sussex RH20 2EW (GB).


Published:

— without international search report and to be republished upon receipt of that report

(74) Agents: FRY, Alan, Valentine et al.; Fry Heath & Spence LLP, The Gables, Massetts Road, Horley, Surrey RH6 7DQ (GB).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FLUID DISPENSER

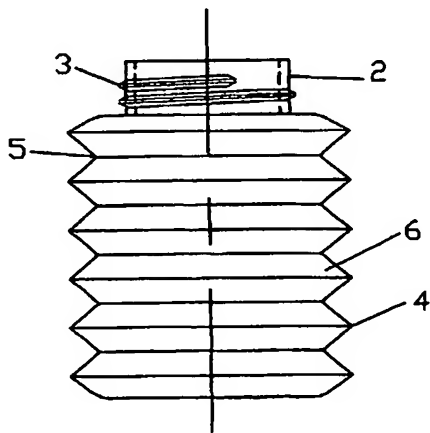

(57) Abstract: A fluid dispenser is extruded from a low density polyethylene material and moulded under pressure to form a body which comprises a bellows closed at one end and including at its other end an upstanding open-ended neck portion formed with external screw threads. The bellows comprises a plurality of vertically spaced ring-shaped outer fold-lines and a plurality of vertically spaced inner ring-shaped fold-lines of smaller diameter than that of the outer fold-lines. Each inner ring-shaped fold-line is positioned at a height generally midway between each pair of outer fold-lines, and annular webs extend between neighbouring inner and outer fold-lines. The mean thickness of the webs is between 0.4 and 1.50mm, the height of the dispenser is between 55 and 85mm and the weight of the dispenser is between 10 and 17.5 grams.

WO 2004/022436 A2